

HEIGHT ADJUST PARAMETER


WARNING THE 'B LENGTH' MUST NEVER BE EXTENDED BEYOND ITS MAXIMUM CAPACITY. (GROOVE INDICATES MAXIMUM LENGTH)

Stay within the allowed parameter when adjusting the suspension height. Failure to do so may result in serious injury and or damages.

Factory setting refers to what the suspension is set from Cusco, straight out of the box.


	B PARAMETER	FACTORY SETTING
FRONT	170 mm ~ 210 mm	190 mm
REAR	145 mm ~ 180 mm	165 mm

*REFER TO SEPARATE RIDE HEIGHT SETTING INSTRUCTIONS

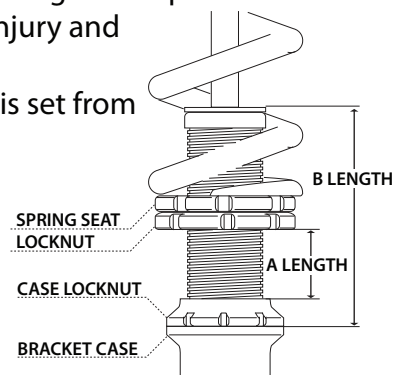


CAUTION

The groove in the shock body thread indicates the maximum height the suspension is capable of being set. Make sure that this groove is not visible above the locknut after setting the suspension height. Beware that the suspension assembly may collapse and fail if it is set too high.



VEHICLE RIDE HEIGHT

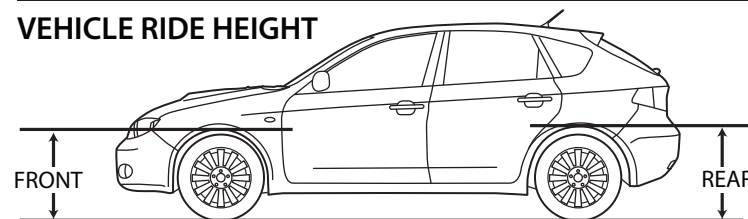

WARNING ALWAYS PERFORM AN 4 WHEEL ALIGNMENT AFTER ALTERING VEHICLE RIDE HEIGHT.

※ Tire size and tread wear rate may alter results.

RIDE HEIGHT vs. STOCK

Front A = 65mm	Rear A = 20mm
Front Height = -20mm	Rear Height = -20mm


WARNING

The numbers indicated in the charts represent data taken from the Cusco test vehicle. Use for reference only, always measure and take into consideration alternate factors such as wheel size and supporting modifications.

CAMBER ADJUSTMENT

WARNING The numbers and degree gauge on the sliding portion of the upper mount is for reference only. Always do a proper camber adjustment with the correct tool after adjusting suspension

WARNING Too much camber on the wheels will cause uneven and premature tire wear as well as hinder performance. Please follow manufacturer camber specification.

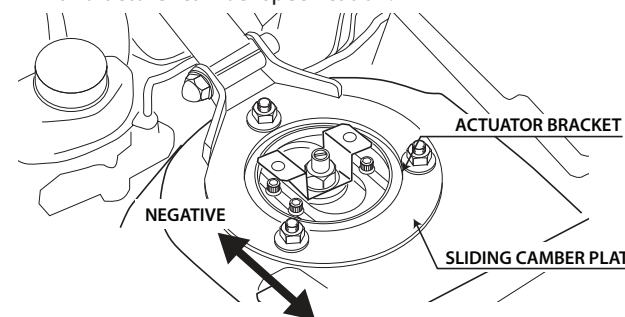

① Loosen the four allen head cap bolts to enable the sliding mechanism.

② Slide the plates to adjust the camber angle.

* Sliding it towards the inside will be negative camber, sliding it towards the outside is positive.

* If the adjustment allen head bolts make contact with the chassis and limits the camber adjustment, relocate the allen bolts to a different threaded hole.

③ Install a proper camber gauge to the left and right wheels. Adjust the degree of the camber by sliding the plate towards the inside or outside until the desired degree is achieved.

* Adjust the toe with a proper toe gauge afterwards.

④ Recheck the measurement on both sides with the camber gauge to confirm that it is within its allowed parameter. Tighten the four allen head bolts. (Torque=12~14Nm)
Turn the actuator bracket clockwise to enable access to the camber adjustment bolts.

⑤ Please see the front suspension install guide pg 3~4 for the actuator direction.

POSITIVE

TEST VEHICLE DATA SPEC

※Data below represents specifications from the Cusco test vehicle. Results may vary depending on year, grade, model.

VEHICLE	2004 Subaru Impreza CBA-GH8			
GRADE	S-GT			
WHEEL SIZE	Front	7.0JJ-18 OFF +46		
	Rear	7.0JJ-18 OFF +36		
TIRE SIZE	Front	215/45-18	Rear	215/45-18
TOE	Front	0 ±3mm	Rear	0 ±3mm
CAMBER	Front	-0° 10' ±45'	Rear	-1° 15' ±45'
CASTER	Front	5° 55'		
	Front	-45~0mm	Rear	-50~0mm

※Refer to the manufacturer factory service manual for the wheel alignment specifications.

※The suspension unit shown in the illustration may not depict actual unit.

PROGRESSIVE EQUIPMENT®
CUSCO ZERO-2E

@con. ELECTRONIC DAMPER CONTROL COMPLIANT

INSTALLATION MANUAL

ALWAYS USE THE FACTORY SERVICE MANUAL AS REFERENCE



SUBARU IMPREZA WRX

2008+ GH8 Model

[PART NO. 691 60M CP] (REAR PILLOWBALL MOUNT*)

*PILLOWBALL MAY INCREASE SUSPENSION NOISE

@con. CONTROLLER IS AN ELECTRONIC DEVICE WHICH ENABLES DAMPER ADJUSTMENT FROM THE DRIVER SEAT. MUST BE PURCHASED SEPARATELY.

TABLE OF CONTENTS

● Suspension kit contents	1 P
● Warning before starting installation	1 P
● How to read the warning icons	1 P
● Suspension assembly diagram	2 P
● Replacement parts list	2 P
● Front suspension removal & installation	3 P
● Rear suspension removal & installation	5 P
● Shock absorber adjustment parameter	7 P
● Vehicle height reference	7 P
● Camber adjustment	7 P
● CUSCO test vehicle specification	7 P

★ Please refer to separate document for height & damper adjustment



WARNING Modifications to interior panels may be necessary.



WARNING Damper adjustment is performed using the dial located on top of the shock absorber shaft. Some models may require removal of plastic trims, upholstery, and even the rear seats for adjustment.

CONTACT:
CUSCO USA INC.

16631 Gemini Lane
Huntington Beach, CA 92647 USA
Phone: (714) 907-0033 Fax: (714) 369-8142



SUSPENSION KIT CONTENTS

Please confirm kit contents before starting installation

FRONT SUSPENSION KIT	×2	INSTRUCTION MANUAL	×1
REAR SUSPENSION KIT	×2	INSTALLATION MANUAL	×1
CAMBER ADJUSTMENT WRENCH (6 SIDED)	×1	SUSPENSION ADJUSTMENT GUIDE	×1
HEIGHT ADJUSTMENT WRENCH	×2	1. HEIGHT ADJUSTMENT	
DAMPER ADJUSTMENT TOOL	×1	2. DAMPER RATE ADJUSTMENT	
e-con COMPONENTS			
E-CON ACTUATOR BRACKET (REAR)	×2		
E-CON ACTUATOR BRACKET NUT (M12X1.25)	×2		

WARNING BEFORE STARTING INSTALLATION

1) BEFORE REMOVING EXISTING SUSPENSION UNIT

- GET FAMILIARIZED WITH THE MOUNTING AREAS AND ALL SURROUNDING COMPONENTS.
- CLEAN MOUNTING POINTS AND OTHER IMPORTANT AREAS WITH BRUSH.
- APPLY AND SOAK PENETRATION OIL BEFORE ATTEMPTING TO REMOVE RUSTED HARDWARE.
- DO NOT COMPLETELY DISCARD REMOVED COMPONENTS UNTIL THE NEW SUSPENSION IS FULLY INSTALLED.

2) WHEN INSTALLING NEW SUSPENSION UNIT

- CHECK PRODUCT PART NUMBER AND VEHICLE APPLICATION BEFORE HANDLING PRODUCT.
- INSPECT ALL INCLUDED COMPONENTS AND MAKE SURE NOTHING IS MISSING.
- CHECK TO SEE IF INSTALLED COMPONENT DOES NOT MAKE CONTACT WITH BODY, TIRES, OR WHEELS.

HOW TO READ THE WARNING ICONS

This installation manual contains these warning icons. Acknowledge each and every warning before starting.



WARNING

Ignoring this warning icon may result in serious injuries or even death. Fully acknowledge the instructions and follow with extreme caution.



CAUTION

Ignoring this caution note may result in injury or damages inflicted upon the product and/or vehicle.



OTHER WARNING ICONS



PROHIBITED



FIRE HAZARD



DO NOT DISASSEMBLE / MODIFY




CHECK



Jack Stands



Coilover Wrench



Torque Wrench




Socket Wrench



Hydraulic Jack



Impact Gun




Open-end Wrench



Eyelet Wrench




Ratchet Wrench


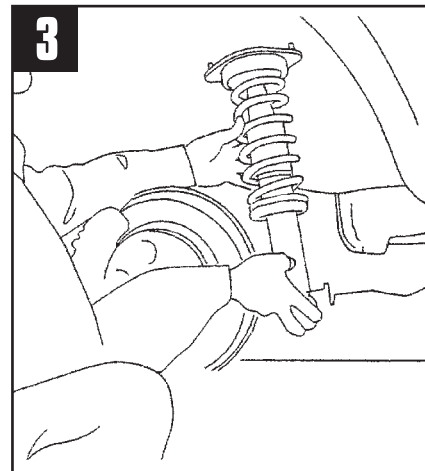


Gently lower the hydraulic jack that is holding up the rear link and remove the 2 flanged bolts that mounts the bottom bracket. Using both hands, remove the suspension strut assembly from the vehicle. (Fig. B)

WARNING WHEN INSTALLING @con

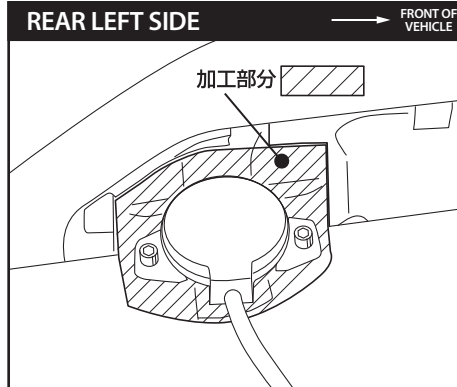

Interior panel and rear center floor mat modification (trimming) necessary for e-con step motor installation. @con. sold separately.

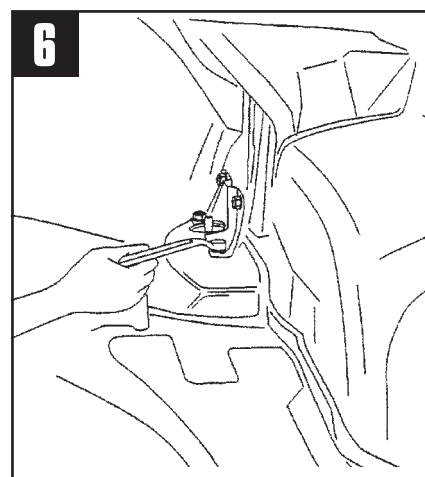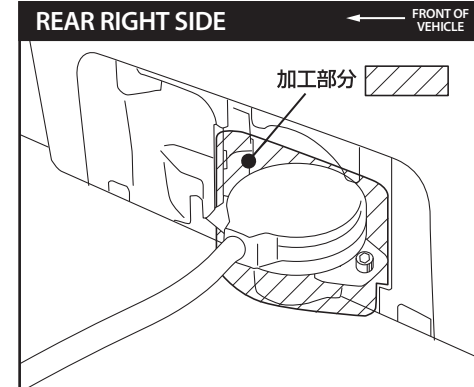


Install the rear upper strut nuts that were removed in step 5. (Torque Spec: 30N-m) Replace rear plastic trim with factory clips.

WARNING When installing the e-con step-motor

For rear pillowball upper mount applications, the actuator bracket for the e-con unit is installed on top of the existing nylon nut. The bracket is sandwiched between the two upper shaft nut. (Torque=25Nm) Please see assembly diagram on page 2.

Make sure that the actuator bolts line up parallel to the strut bolts like pictured below.

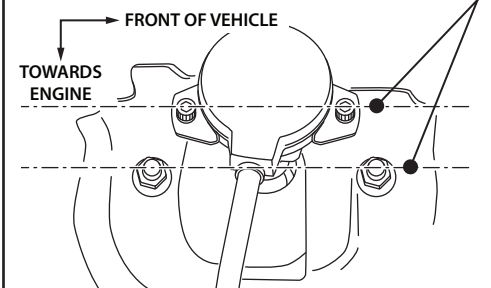

Always install the actuator bracket and step motor as pictured in the diagram. Never turn the step motor counter clockwise when adjusting its position. Always turn clockwise. ※ For e-con step motor mounting instructions, please see e-con installation manual.

WARNING

Interior panel and rear center floor mat modification (trimming) necessary for econ step motor installation. Please modify the rear centerfloor mat so that it does not make contact with the shock absorber.

WARNING


Make sure there is atleast 5mm of clearance for the area around the step motor. The bracket will rotate so please make sure there is enough clearance for 360 degree operation. For e-con step motor mounting instructions, please see e-con installation manual.

※The suspension unit shown in the illustration may not depict actual unit.

REAR REAR SUSPENSION


WARNING OEM FACTORY PARTS WILL BE USED. PLEASE PREPARE NEW FACTORY COMPONENTS BEFORE STARTING INSTALLATION.

SCHEMATIC <ASSEMBLY>

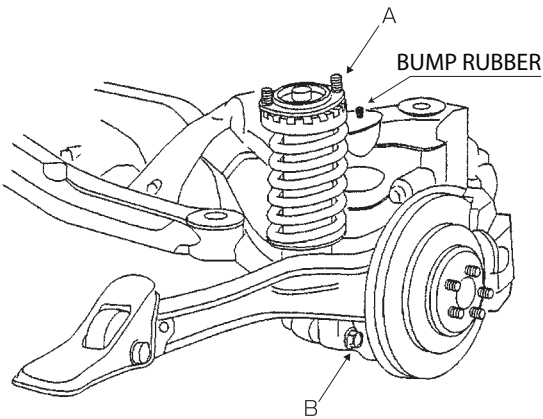


WARNING Completely remove both sides (L & R) of the suspension first before proceeding to install the new units. This applies to both front and rear.

REMOVAL

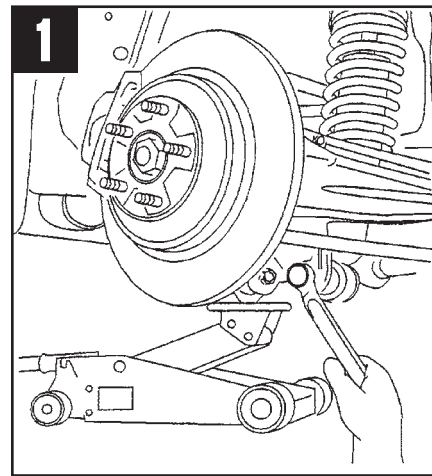


1 Place hydraulic jack under the lower arm and slightly raise up. Remove the flanged nut located on the bottom of the shock absorber. (Fig. B.)

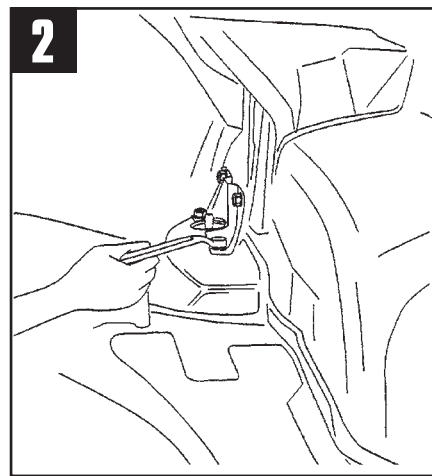


2 Remove the clips that hold the trunk space interior trim, exposing the strut tower. Remove the 2 nuts that hold the shock assembly to the strut tower. (Fig. A.)

INSTALLATION

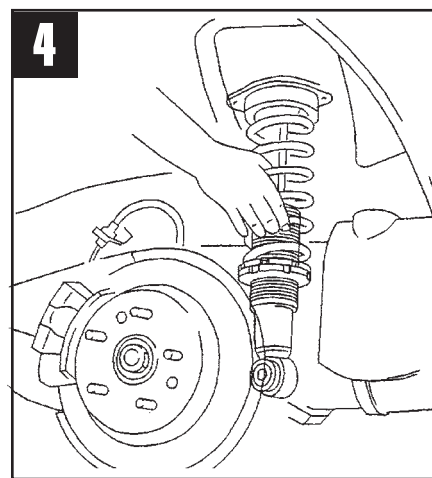


4 Place the shock absorber to the strut location and install the upper mount strut nuts. (Fig. A.)

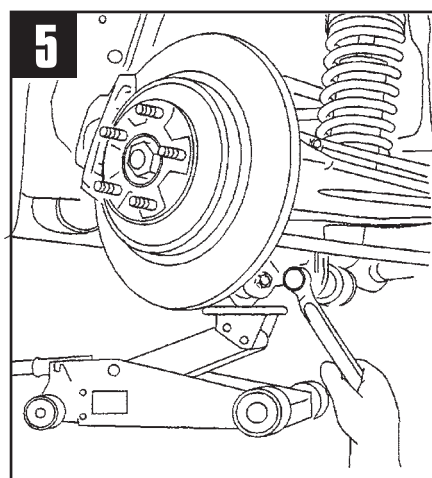

5 Install the bottom bracket bolt by raising and lowering the hydraulic jack to the position where the hole lines up. Insert flanged bolt and secure with flanged nut. It is highly recommended to use new OEM hardware. Torque according to the specification listed. (Torque Spec: 160N-m) (Fig. B.)

WARNING


TAKE EXTRA PRECAUTION FOR ADJUSTMENT DIAL Take extra care when installing the suspension and be extra careful not to damage the adjustment dial. Doing so will inhibit the shock absorber adjustment capabilities as well as other vital features.




REQUIRED FACTORY OEM COMPONENTS

OEM PART NUMBER
902350006
Lower shock absorber nut
902350001
Rear upper mount nut

FRONT SUSPENSION ASSEMBLY DIAGRAM

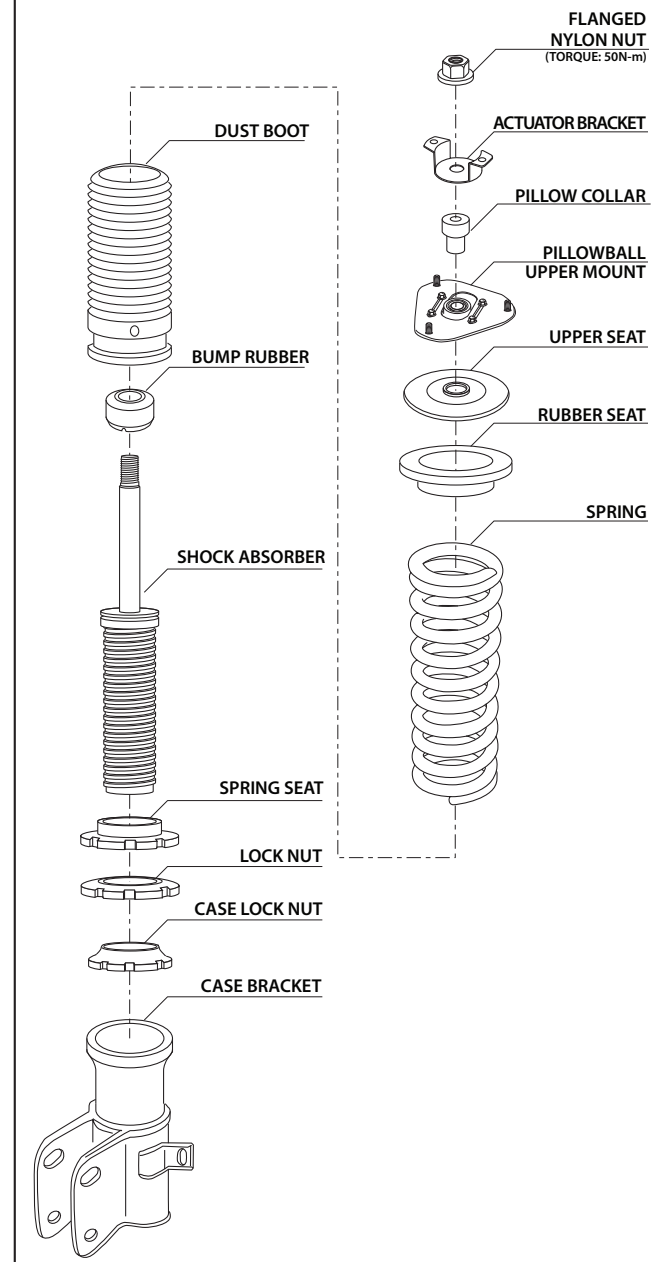

REAR SUSPENSION ASSEMBLY DIAGRAM

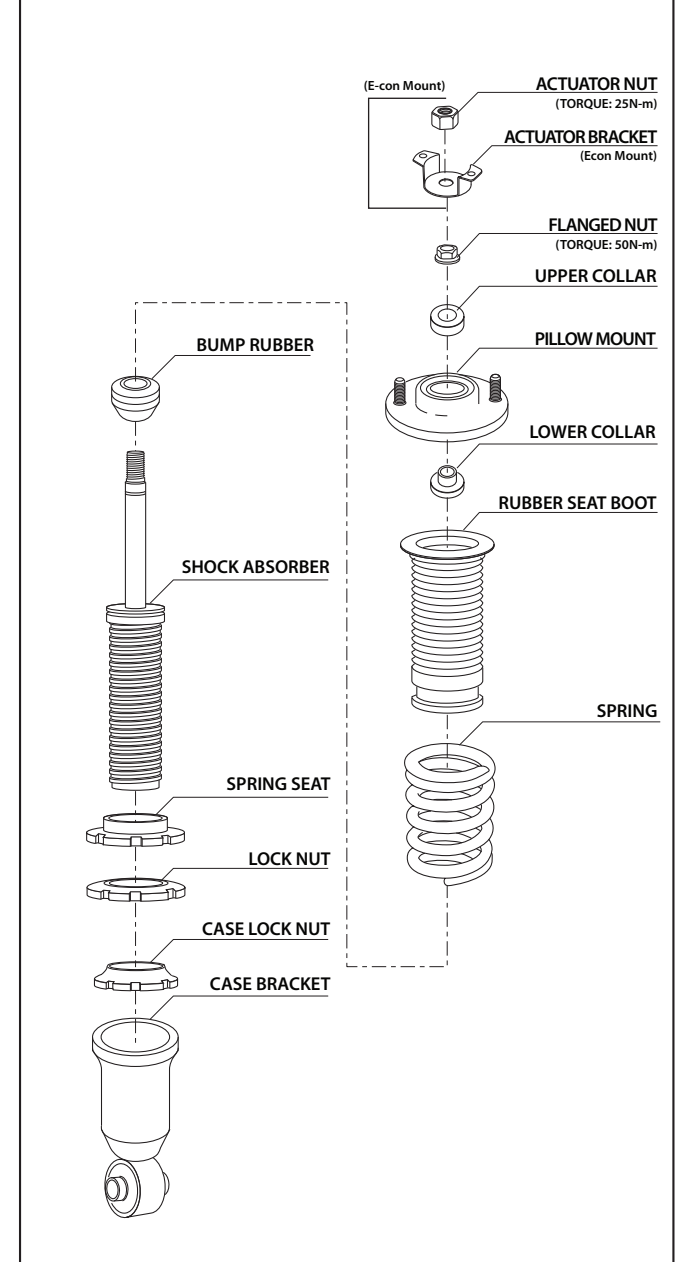

※The suspension unit shown in the illustration may not depict actual unit.

WARNING PRECAUTION WHEN ASSEMBLING THE SUSPENSION

Take extra care when assembling the suspension kit not to overtighten the upper most nut. Tightening above the indicated torque specification may cause irreversible damage to the shock absorber.

WARNING OEM FACTORY PARTS ARE NECESSARY FOR THIS INSTALL. PLEASE ACQUIRE BEFORE STARTING THE INSTALLATION PROCEDURES.

OEM PART NO. 902350013	FRONT / UPPER MOUNT NUT
OEM PART NO. 20550AA010	FRONT / LOWER STRUT NUT
OEM PART NO. 902350001	REAR / UPPER MOUNT NUT
OEM PART NO. 902350006	REAR / LOWER SHOCK ABSORBER BRACKET NUT


REPLACEMENT COMPONENTS

POSITION	PART DESCRIPTION	PART NUMBER	MSRP	NOTES
FRONT	E-CON Compliant Shock Absorber	00B 6CA S67AS	\$347.00 (USD)	RH / LH
REAR	E-CON Compliant Shock Absorber	00B 6CA W72AS	\$280.00 (USD)	RH / LH

※Please refer to the assembly diagram for other replacement components and inquire within.


FRONT FRONT SUSPENSION

WARNING OEM FACTORY PARTS WILL BE USED. PLEASE PREPARE NEW FACTORY COMPONENTS BEFORE STARTING INSTALLATION.

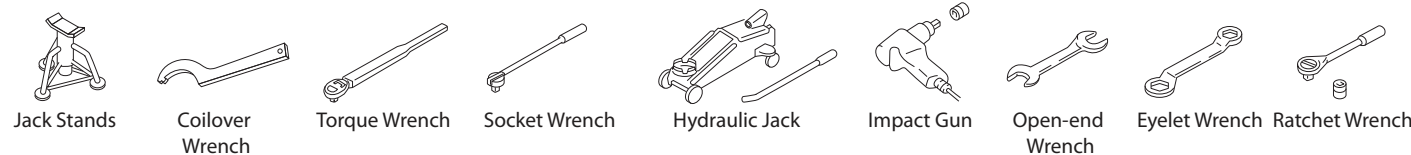


SCHEMATIC <ASSEMBLY>

Align the knuckle to the bolt marking when removing and installing the upper camber adjustment bolt. Always turn the self locking nut by holding down the bolt side when tightening or loosening. Never torque or loosen from the bolt side.

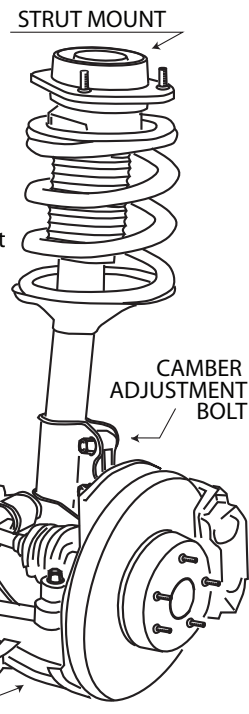

WARNING Completely remove both sides (L & R) of the suspension first before proceeding to install the new units. This applies to both front and rear.

WARNING TAKE EXTRA PRECAUTION FOR ADJUSTMENT DIAL Take extra care when installing the suspension and be extra careful not to damage the adjustment dial. Doing so will inhibit the shock absorber adjustment capabilities as well as other vital features.



REQUIRED FACTORY OEM COMPONENTS

OEM PART NUMBER


20550AA010

Front lower strut nut


902350013

Front upper mount nut


REMOVAL

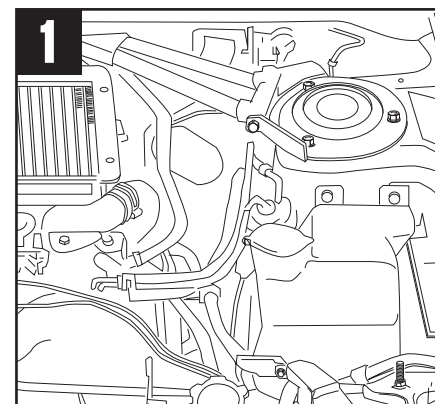


1 Loosen the 3 strut tower nuts inside the engine bay. Only loosen and do not remove these nuts just yet.

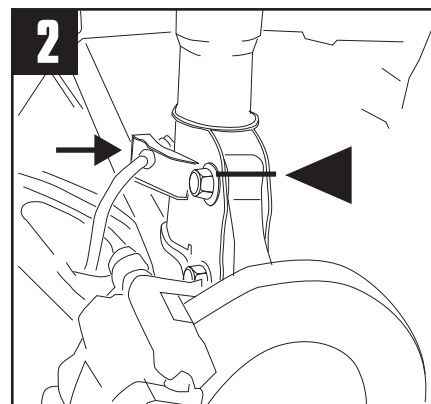

2 Remove the bolt that holds the brake line to the bracket. Mark the knuckle and the upper bolt to the strut camber position. Remove the sensor harness bolt for vehicles equipped with an ABS system.

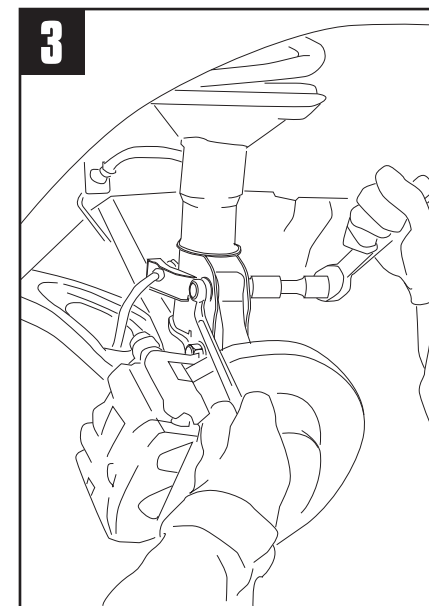

3 Lift the transverse arm area with the hydraulic jack, then proceed to loosen the 2 flanged nuts and bolts.

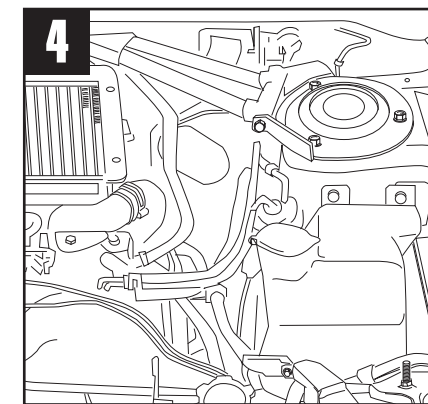


4 Hold the strut assembly while removing the three strut tower nuts that were loosened on step 1. Carefully remove the strut assembly from the vehicle.


WARNING Always use both hands when handling strut assembly. Dropping the unit may cause serious injury & damage to the component.

CAUTION Use caution when removing strut assembly not to damage the ABS sensor harness.


INSTALLATION

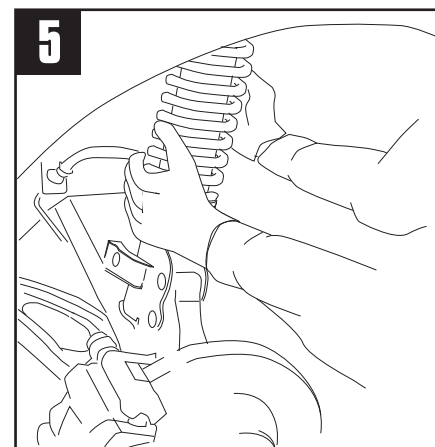

5 Mount the Cusco suspension to the upper strut area using the 3 factory OEM nuts. It is highly recommended to use new OEM hardware. Torque according to the specification listed. (Torque Spec: 20N-m)

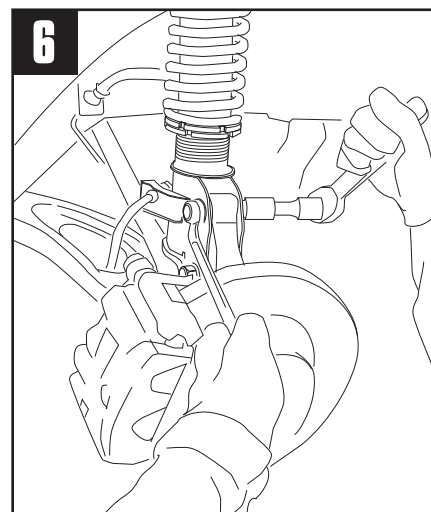


6 Install the bottom bracket bolts by raising the hydraulic jack to the transverse link where the 2 holes line up. It is highly recommended to use new OEM hardware. The nuts are self locking. Torque according to the specification listed. (Torque Spec: 175N-m)

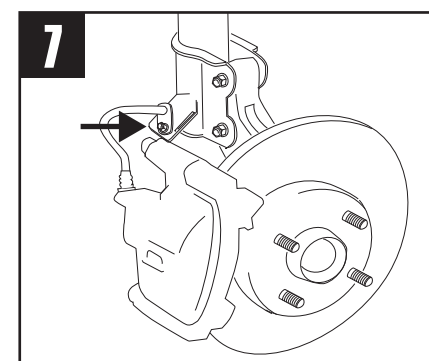

7 Remove the hydraulic jack from underneath the vehicle. Re-install the brake hose to its designated strut tab. (Torque Spec: 30N-m)

Re-install the ABS sensor harness to its designated bracket and torque down accordingly. (Torque Spec: 20N-m)

WARNING Allow atleast 5mm of clearance for the actuator bracket.

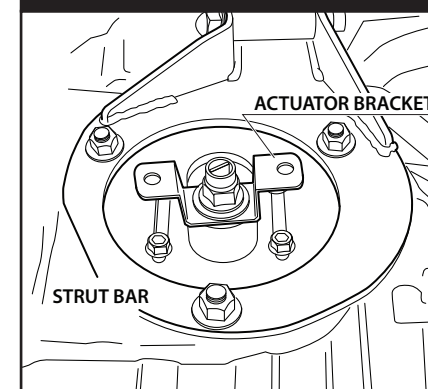

An e-con step motor bracket is mounted on top of the front suspension.

Make sure there is atleast 5mm of clearance for the area around the step motor. The bracket will rotate so please make sure there is enough clearance for 360 degree operation. ※For e-con step motor mounting instructions, please see e-con installation manual.